





TECHNICAL SPECIFICATION

Thermowood


A thermally treated Scandinavian Redwood with a very low moisture content. This makes it much more durable and stable compared to standard Scandinavian Redwood so you can use it as a cladding without a chemical preservative treatment. It is light brown in colour and has a moderate knot content.

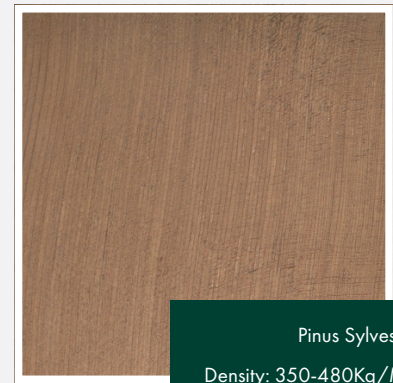

Pinus Sylvestris
Density: 350-480Kg/M3

<p>01 Contemporary Shiplap</p> <p>Finished size: 20mm x 119mm Cover size: 113mm</p>	
<p>02 Round Shiplap</p> <p>Finished size: 21 mm x 118mm Cover size: 109mm</p>	
<p>03 Shadow Gap Vertical Cladding</p> <p>Finished size: 20mm x 119mm Cover size: 113mm</p>	

Drawing No.
12641

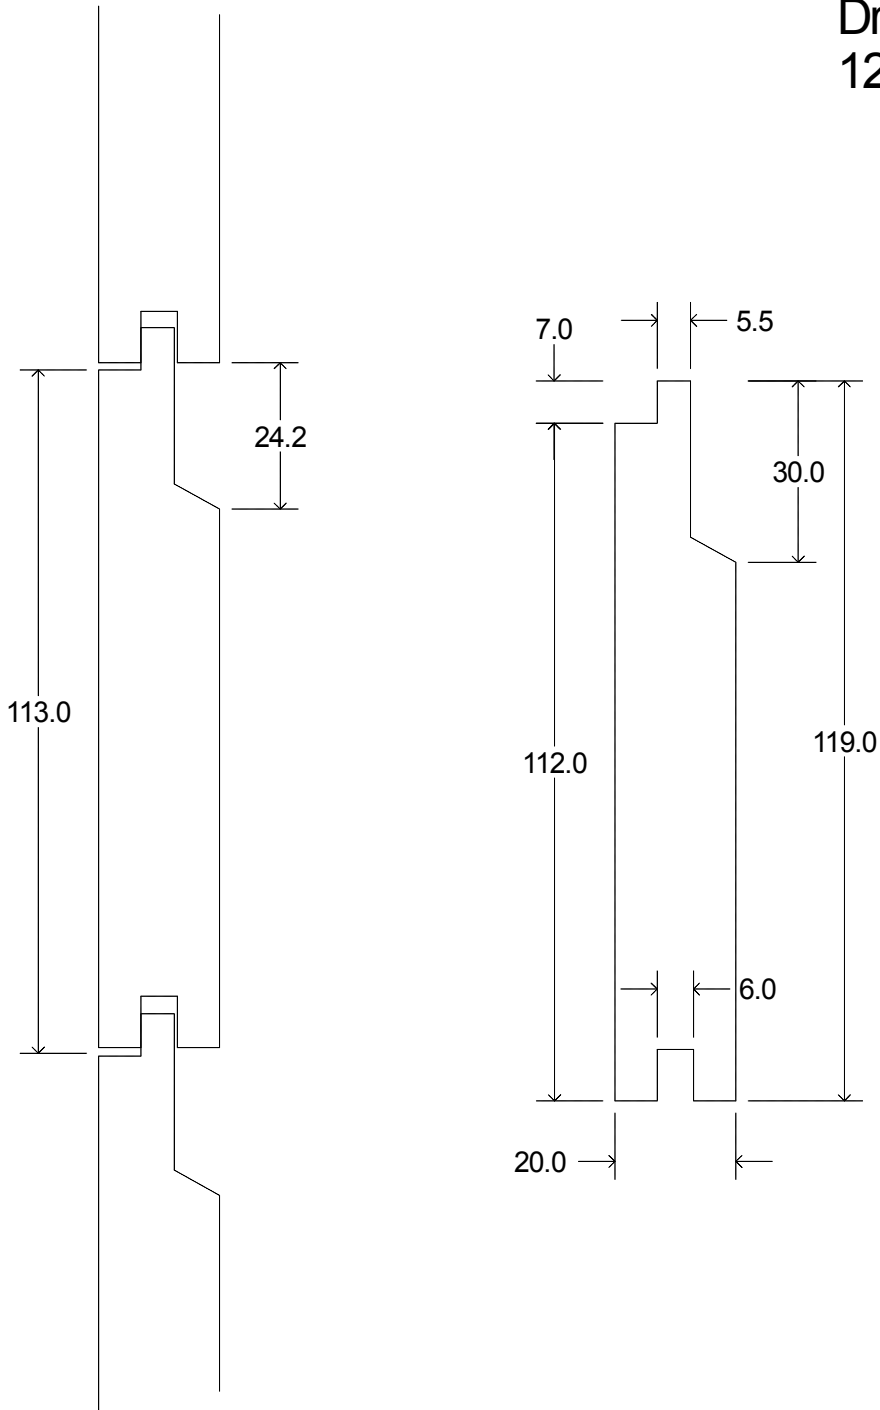


Details
Contemporary Shiplap
20mm x 119mm f/size

Thorogood Timber plc
Drawn by T.A.Thorogood

02

Drawing No.
11716

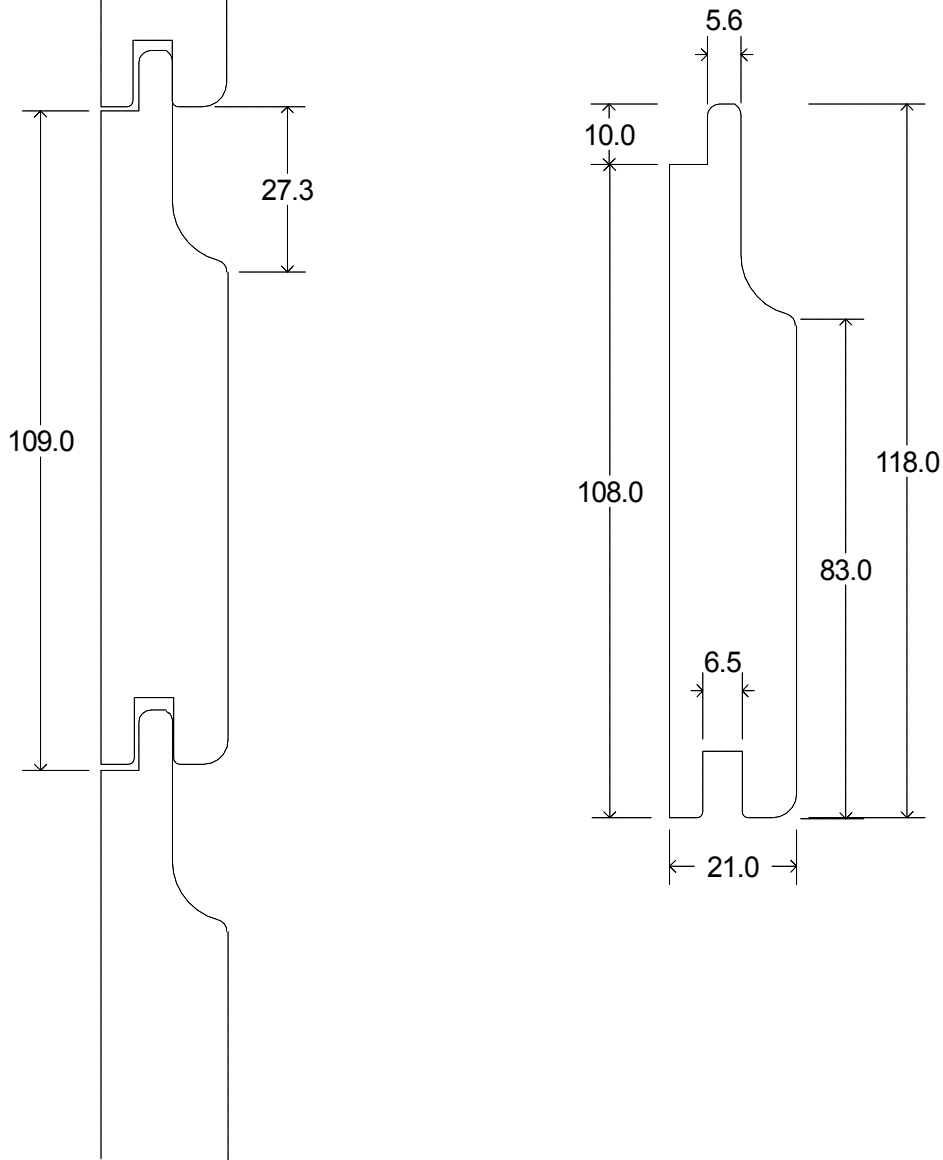


Details
Round Shiplap
21mm x 118mm f/size

Thorogood Timber plc
Drawn by T.A.Thorogood

03

Drawing No.
12640

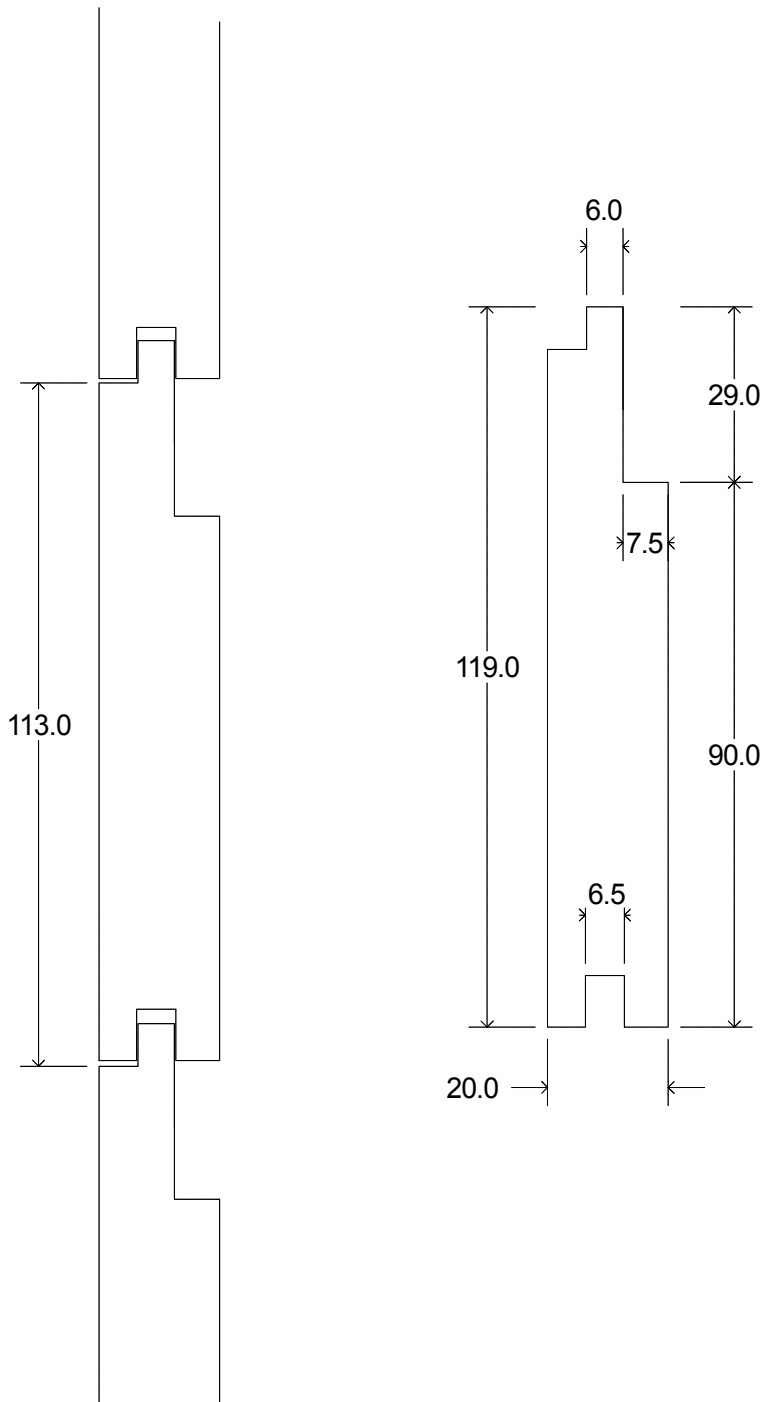

Details
Shadow Gap Vertical Cladding
20mm x 119mm f/size

Thorogood Timber plc
Drawn by T.A.Thorogood